


**Today, we will:**

- Do more example problems – major and minor losses in pipe flows
- Discuss diffusers and show a flow loop demonstration

**Example Problem – Major and Minor Losses in a Piping System**

**Given:** Water ( $\rho = 998$  kg/m<sup>3</sup>,  $\mu = 1.00 \times 10^{-3}$  kg/m-s) flows *by gravity alone* from one large tank to another, as sketched. The elevation difference between the two surfaces is  $H = 35.0$  m. The pipe is 2.5 cm I.D. with an average roughness of 0.010 cm. The total pipe length is 20.0 m. The entrance and exit are sharp. There are two regular threaded 90-degree elbows, and one fully open threaded globe valve.

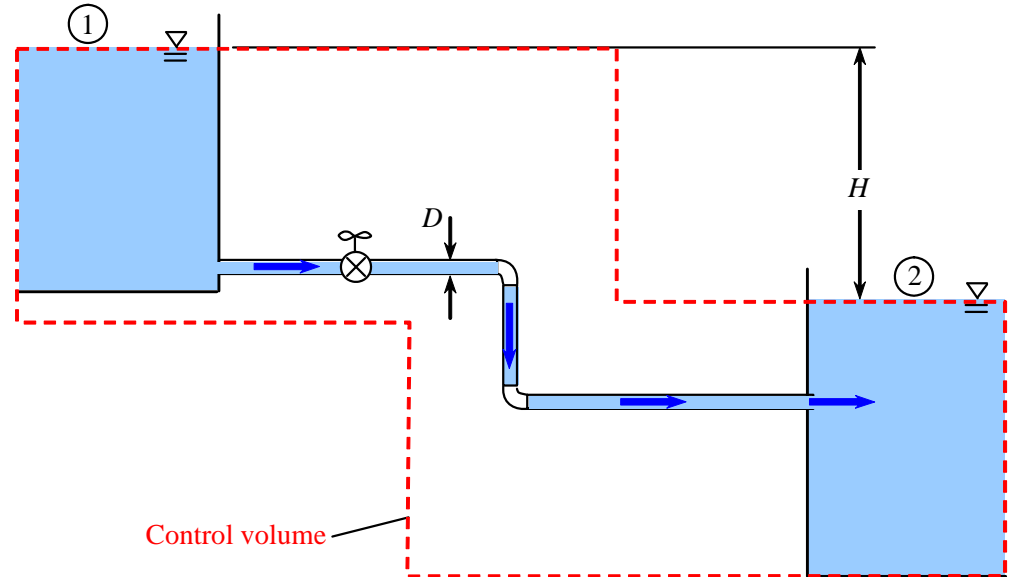

**To do:** Calculate the volume flow rate through this piping system.

**Solution:**

- First we draw a control volume, as shown by the dashed line. We cut through the surface of both reservoirs (inlet 1 and outlet 2), where we know that the velocity is nearly zero and the pressure is atmospheric. The rest of the control volume simply surrounds the piping system.
- We apply the head form of the energy equation from the inlet (1) to the outlet (2):

$$\frac{P_1}{\rho g} + \alpha_1 \frac{V_1^2}{2g} + z_1 + \cancel{h_{\text{pump,u}}} = \frac{P_2}{\rho g} + \alpha_2 \frac{V_2^2}{2g} + z_2 + \cancel{h_{\text{turbine,e}}} + h_L$$

$P_1 = P_2 = P_{\text{atm}}$

$V_1 = V_2 \approx 0$

Therefore, the energy equation reduces to  $h_L = z_1 - z_2 = H$

- Next, we add up all the irreversible head losses, both major and minor. Since the reference velocity is the same for all the major and minor losses (the pipe diameter is constant throughout), we may use the simplified version of the equation for  $h_L$ , i.e., Eq. 8-59:


$$h_L = \left( f \frac{L}{D} + \sum K_L \right) \frac{V^2}{2g}, \quad \& \quad \text{Re} = \frac{\rho D V}{\mu} \quad \dot{V} = V \frac{\pi D^2}{4} \quad \frac{\varepsilon}{D} = \frac{0.010 \text{ cm}}{2.5 \text{ cm}} = 0.004$$

- We also need either the Moody chart or one of the empirical equations that can be used in place of the chart (e.g., the Colebrook equation).

The rest of this problem will be solved in class.

### Example Problem – Diffuser

**Given:** Water ( $\rho = 1000 \text{ kg/m}^3$ ,  $\mu = 1.00 \times 10^{-3} \text{ kg/m}\cdot\text{s}$ ) flows through a horizontal diffuser, as sketched. The flow is fully developed at both locations 1 and 2. The inner diameter changes from  $d$  to  $D$  through the diffuser. The outlet of the diffuser is open to atmospheric pressure.

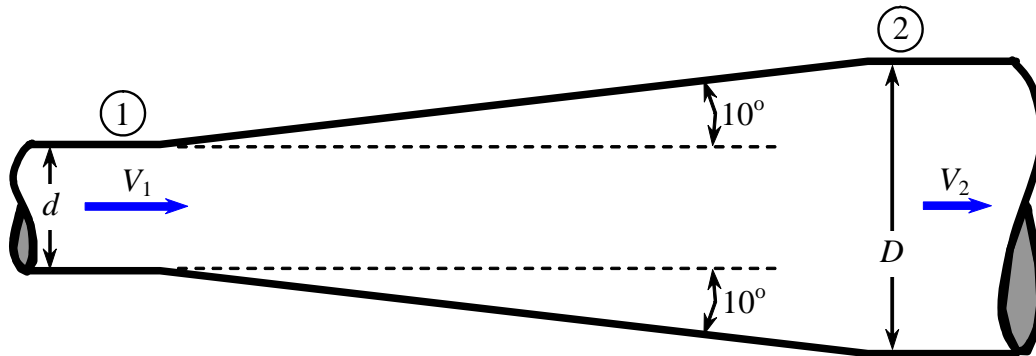

#### Given information:

- $d = 1.2 \text{ cm}$
- $D = 2.0 \text{ cm}$
- $\theta = 2 \times 10^\circ = 20^\circ$  ( $\theta$  is the total included angle)
- $V_1 = 6.0 \text{ m/s}$
- $P_2 = P_{\text{atm}}$
- $\alpha_1 = 1.06$  and  $\alpha_2 = 1.06$  (fully developed turbulent pipe flow)

**To do:** Calculate the gage pressure at location 1 and discuss.

**Solution:** *To be done in class.*